

**TECHNICAL DATA SHEET (TDS)**

**Metal wire mesh for the fixation of water swellable sealing bars.**

**USE**

- Developed for the fixation of water swellable sealing bars in concrete construction joints or reinforced concrete construction. Is preferentially used in combination with Bentobar+ sealing bars.
- Ensures good fixation of the sealing bar, especially in vertical applications.


**DESCRIPTION**

- Expanded metal grid made of galvanized U-shaped steel
- Can be nailed, dowelled or tacked

**APPLICATION**

- Place BENTOBAR+ on a smooth and dust free surface (concrete).
- Avoid shifting or floating of the sealing bar to be installed.
- Fixation of the wire mesh is performed by nailing, dowelling or tacking with a recommended spacing of 25cm.

**EXEMPLARY APPLICATION**

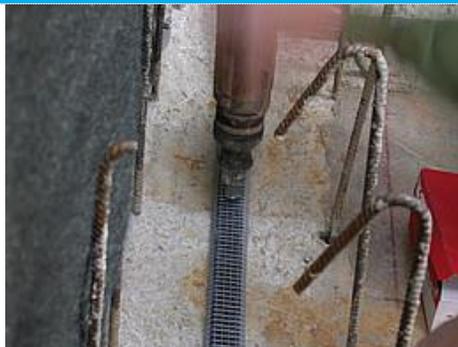

**SIZES AND PACKAGING**

Shape	Length	Pcs. / Box
U shape	1 m	30 pcs.